Mini PAGlink™

BATTERY EVOLUTION

• Smaller • Lighter • Intelligent • Linking
• Compatible • Serviceable

Swap the USB output connector for a Lemo, Hirose or another D-Tap

PAG™

Mini PAGlink™

- All the benefits of PAGlink intelligent linking technology combined with a reduced form factor and increased durability.
- Designed to power smaller 4K camcorders and their accessories (12V & 5V) simultaneously and suitable for multiple applications.
- Replace a multitude of incompatible batteries with a single, superior power source for the entire set-up.
- Built-in outputs for camera accessories: 1 x fixed D-Tap and 1 x USB (2A) which can be swapped for a Lemo, Hirose or D-Tap by the user.
- Compatible with full-size Gold Mount camera plates, PAGlink Gold Mount batteries, PAGlink Gold Mount chargers and Anton/Bauer chargers for maximum versatility and economic integration.
- Control the capacity and weight of your power source to suit the application: 1 battery for handheld applications, 2 - 4 batteries for more current or longer run-time.

Mini PAGlink gives you all this and more...

- Flight-friendly, 50Wh batteries that can be linked to extend run-time, allowing you to travel with all the power you need.
- Simultaneous discharge from linked batteries which means no dead weight on your camera.
- An increased current draw from 8A individually to 12A, when batteries are linked; ideal for camera set-ups that require power for multiple accessories.
- Seamless hot-swapping for continuous power, or the ability to add another battery just to keep shooting.
- An extended overall battery life, a 2yr guarantee and a better return on investment, because linked batteries share the load.
- Efficient, linked battery charging using PAGlink chargers: up to 8 batteries on each position.
- Ergonomic design for safer handling, combined with increased durability from a 'soft-touch' coated protective band.
- Two 1/4" bush inserts for mounting accessories to individual or linked batteries.
- An accurate, numeric display which shows run-time on-load in 1 minute increments, capacity any time in 1% increments, and useful data to assist with battery management.
- Communication with the camera data system that displays capacity in the viewfinder/LCD.
- Fully-serviceable, modular construction that allows authorised replacement of the cell-pack whilst maintaining conformity with UN standards.
- PAG's patented linking technology which remains far in advance of any other camera battery system available today.

SMALLER BATTERY

SMALLER MOUNT

SMALLER CAMERAS

MPL50G BATTERY SPECIFICATION:

Model No.	7141
Connection:	Gold Mount
Capacity:	50 Watt-hours (3.5Ah)
Voltage:	14.8V nominal
Output Current:	12A when linked / 8A individually
Outputs:	1 x D-Tap, 1 x USB (5V 2A)
Weight:	12.7oz (360g)

Dimensions:

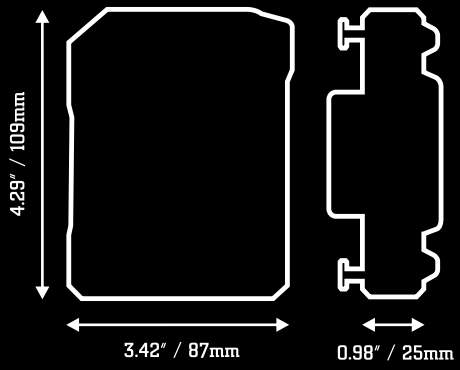

Size Comparison:



Patents Apply: paguk.com/patents. All third party trademarks are acknowledged as such.

©Copyright PAG Ltd. MAR 2020

PAG™

www.paguk.com

The Americas
PAG America, +1 631 300 8215, sales@pagamerica.com

UK, Europe & Middle East
Aspectra, NL, +31 10 514 0680, info@aspectra.nl

Rest of the World
PAG Ltd. UK, +44 (0)20 8543 3131, sales@paguk.com