


## DATA SHEET

# PAGlink V-Mount PowerHub

PAG-9709 / EAN 5060854320247



- Power 12V camera accessories from PAGlink V-Mount batteries.
- Sandwich PowerHub between batteries to maintain hot-swap capability.
- Keep accessories plugged-in and powered-up when changing batteries.
- Includes 4 x D-Tap outputs for 12V camera accessories.
- Includes a 2A USB output for 5V accessories or charging your phone.
- Interchangeable Lemo and Hirose output units available separately.

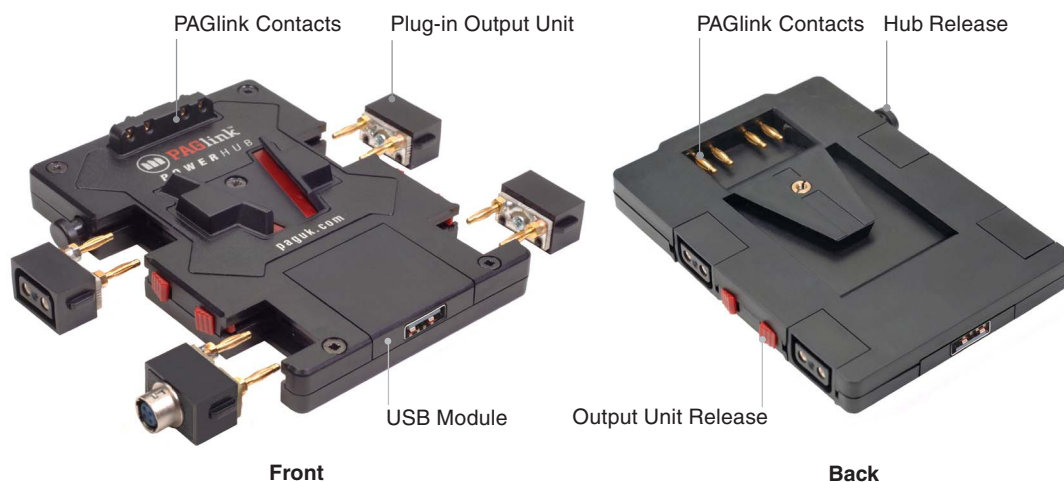

The PowerHub is a compact and user-configurable camera accessory power device, designed for use with the PAGlink V-Mount system of intelligent linking batteries.

The PAGlink battery system is designed for high-load camera set-ups; the linked batteries provide up to 12A, enabling you to power simultaneously the camera and multiple 12V accessories, such as a camera light, a monitor, or audio and transmission devices. The PowerHub provides the multiple outputs that are required to do this.

PowerHub incorporates four output ports that accept a range of interchangeable, plug-in connector units. Four D-Taps are supplied as standard. The D-Taps enable you to power 12V camera accessories that draw up to 10A. The connector units are interchangeable with Lemo (2-pin), Hirose (4 pin) or 2.1mm (PP90) connectors, available separately. Any unit can be used in any of the 4 ports, enabling you to configure the PowerHub to your exact requirement.

The V-Mount PowerHub also features a USB output unit, allowing you to power 5V camera accessories that draw up to 2A continuously, 3A peak. It can even be used to power a GoPro camera or charge your phone.

The ultra-compact and lightweight PowerHub is designed to be used sandwiched between two PAGlink batteries, increasing the depth of the battery stack by just 12mm (1/2"). This enables the rear battery to be hot-swapped without disconnecting the accessories. Alternatively, the PowerHub can be connected to rear battery of the stack.

The PowerHub Model 9709 can only be used with PAGlink V-Mount batteries Models 9303, 9304, 9308 & 9309. It draws power from the PAGlink contacts on the front face of the battery. It cannot be connected directly to the camera or used with Mini PAGlink or non-linking V-Mount batteries.

## SPECIFICATION

### PAGlink V-Mount PowerHub

#### Model No. 9709

##### 4 x D-Tap Outputs:

Suitable for 12V camera accessories. The output is unregulated.

##### 1 x USB Output:

Regulated at 5V (2A continuous, 3A peak). Incorporates voltage output protection.

##### Dimensions:

Length: 112mm (4.4").  
Width: 83mm (3.3").  
Height: 18mm (0.7").

##### Weight:

100g (3.5oz).

### Output Units available individually:




USB (5V, 2A)  
Model 9709U  
*Replaces the 1A  
version pre-August  
2019*



Hirose (4-pin)  
Model 9709H



Lemo (2-pin)  
Model 9709L



2.1mm (PP90)  
Model 9709P



D-Tap  
Model 9709D

© PAG Ltd. PAG is the trademark of PAG Ltd. / PAG reserves the right to change the specifications contained herein without notice.



**PAG Ltd. UK**  
Epsom Downs Metro Centre  
Units 9 & 10, Waterfield,  
Tadworth, Surrey KT20 5LR

**E** sales@paguk.com  
**T** +44 (0)20 8543 3131  
**www.paguk.com**