

PAGlink™ **POWERHUB**




Link-up and Power-up

PAGlink is the only battery system that allows power to be drawn from the battery linking contacts. Linked PAGlink batteries provide up to 12A and are designed to power cameras and accessories simultaneously. The power can be accessed by attaching the low-profile and lightweight **PAGlink PowerHub**, which can be used to power up to four 12V camera accessories, such as an on-board light, a monitor, transmission and audio equipment.

The PAGlink PowerHub incorporates four D-Tap output connectors that are interchangeable with 2-pin Lemo, 4-pin Hirose or 2.1mm DC plug-in connectors, available individually.

The plug-in connectors allow you to reposition the output to the left or right side of the camera, and to swap connector types, thereby customising the PowerHub to your individual requirement.

A USB module (2 Amp) is incorporated that allows you to power other camera accessories (5V) or charge your smartphone.

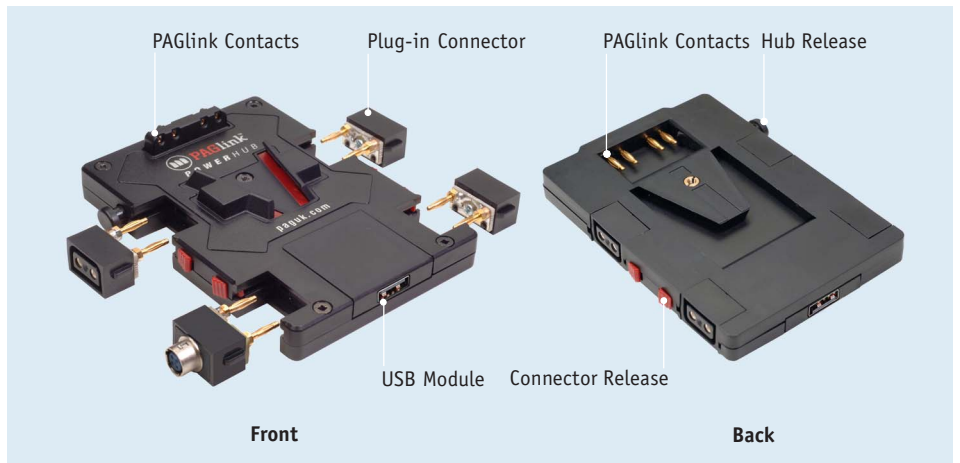

Sandwich the PowerHub between batteries to maintain the PAGlink system's hot-swap feature.



Use the PowerHub on the rear battery so that an accessory holder can be mounted to its face.



PAGlink PowerHub

- Power more 12V camera accessories using PAGlink batteries
- Use between batteries to maintain the battery hot-swap feature
- Use on the rear battery to enable the mounting of an accessory holder
- 4 x D-Tap output connector units (12V)
- 1 x USB (2A) module for powering 5V devices that draw up to 2A, or for charging your phone
- 83 x 112 x 18mm (12mm deep between batteries) / 100g

Model 9709

PAGlink PowerHub Connectors

The PAGlink PowerHub accepts a range of interchangeable plug-in output connectors. PowerHub Model 9709 is

supplied with four D-Tap connectors, however, alternative connectors can also be purchased individually.

USB Module (2A)

Model 9709U



REPLACES
ORIGINAL
1A VERSION

- For powering 5V camera accessories that draw up to 2A continuously, 3A peak.
- Includes voltage output protection.

Hirose Connector


Model 9709H



- Plug-in 4-pin Hirose output connector
- Interchangeable with other connector types
- User-configurable to the left or right side of the PowerHub
- For powering 12V camera accessories

Lemo Connector

Model 9709L

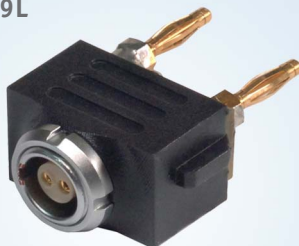

- Plug-in 2-pin Lemo output connector
- Interchangeable with other connector types
- User-configurable to the left or right side of the PowerHub
- For powering 12V camera accessories

2.1mm (PP90) Connector

Model 9709P



- Plug-in 2.1mm (PP90) output connector
- Interchangeable with other connector types
- User-configurable to the left or right side of the PowerHub
- For powering 12V camera accessories